

Model 7704A Piezoelectric accelerometer

Features

- To +550°F (+288°C), temperature compensated
- Hermetically sealed
- Ground isolated
- Top connector
- MIL-STD 740-2 applications






Description

The Endevco® Model 7704A-XXXX Isoshear piezoelectric accelerometer is designed for general vibration measurement on structures and objects. The Isoshear design is extremely stable and insensitive to such environmental inputs as base bending and thermal transients. This accelerometer has been tested in a radiation environment up to 10^8 rads without performance degradation. It is also capable of accurate vibration measurement up to +550°F (+288°C). This unit is hermetically sealed against external contamination. The accelerometer is a self-generating device that requires no external power source for operation.

The Model 7704A-XXXX features Endevco's Piezite® Type P-8 crystal element, operating in shear mode. Signal ground is isolated from the outer case of the unit. The accelerometer features a 10-32 top-connector. A low-noise coaxial cable is supplied for error-free operation. The model number suffix indicates acceleration sensitivity in pC/g; i.e., 7704A-100 features output sensitivity of 100 pC/g.

Endevco signal conditioner Models 133, 2775A or Oasis 2000 computer-controlled system are recommended for use with this high impedance accelerometer.

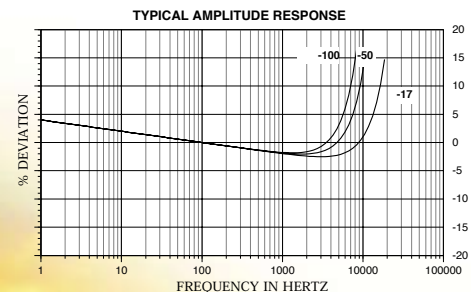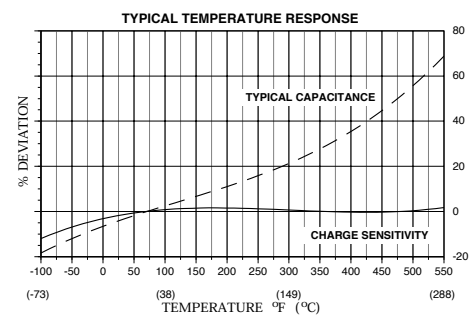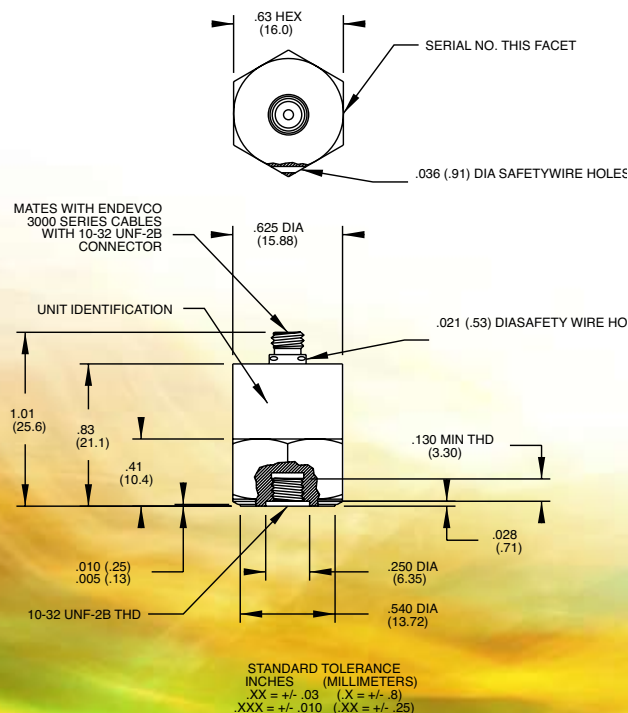

Model 7704A Piezoelectric accelerometer

Endevco

SPECIFICATIONS

The following performance specifications conform to ISA-RP-37.2 (1964) and are typical values, referenced at +75°F (+24°C) and 100 Hz, unless otherwise noted. Calibration data, traceable to National Institute of Standards and Technology (NIST), is supplied.

DYNAMIC CHARACTERISTICS	Units	-50	-100
CHARGE SENSITIVITY			
TYPICAL	pC/g	50	100
MINIMUM	pC/g	45	90
FREQUENCY RESPONSE		See Typical Amplitude Response	
RESONANCE FREQUENCY	kHz	26	20
AMPLITUDE RESPONSE [1]			
±5%	Hz	1 to 6 000	1 to 5 000
±1dB	Hz	1 to 9 000	1 to 8 000
TEMPERATURE RESPONSE		See Typical Curve	
TRANSVERSE SENSITIVITY	%	≤ 3	
AMPLITUDE LINEARITY [2]	%	1/250 g	1/125 g
Up to vibration limit			

ELECTRICAL CHARACTERISTICS

OUTPUT POLARITY		Acceleration directed into base of unit produces positive output at center socket of receptacle	
RESISTANCE	GΩ	≥ 10	
ISOLATION	GΩ	≥ 1	
CAPACITANCE	pF	2800	
GROUNDING		Signal return isolated from case	

ENVIRONMENTAL CHARACTERISTICS

TEMPERATURE RANGE [3]		-67°F to +550°F (-55°C to +288°C)	
HUMIDITY		Hermetically sealed	
SINUSOIDAL VIBRATION LIMIT	g pk	2000	1000
SHOCK LIMIT	g pk	10000	5000
BASE STRAIN SENSITIVITY	equiv. g pk/μ strain	0.0016	0.0008
ELECTROMAGNETIC SENSITIVITY	equiv. g rms/gauss	0.0002	0.0002
THERMAL TRANSIENT SENSITIVITY	equiv. g pk/°F (°C)	0.0004	0.0003
RADIATION			
INTEGRATED GAMMA FLUX	rad	Up to 10 ⁸	
INTEGRATED NEUTRON FLUX	N/cm ²	Up to 10 ¹⁰	

PHYSICAL CHARACTERISTICS

DIMENSIONS		See Outline Drawing	
WEIGHT	gm (oz)	25 (0.9)	29 (1.0)
CASE MATERIAL		Stainless Steel	
CONNECTOR		Coaxial receptacle with 10-32 UNF threads designed to mate with Endevco Model 3000 Series Cable	
MOUNTING TORQUE	lbf-in (Nm)	18 (2)	

CALIBRATION

SUPPLIED:			
CHARGE FREQUENCY RESPONSE	% dB	20 to 6 kHz 6 kHz thru resonance	20 to 5 kHz 5 kHz thru resonance
CHARGE SENSITIVITY	pC/g		
MAXIMUM TRANSVERSE SENSITIVITY	%		
CAPACITANCE	pF		

INCLUDED ACCESSORIES

Model 3090DV-120 (10 ft)	CABLE ASSEMBLY, for use to +500°F (+260°C)
Model 92981-12 EHM464	HEX ID HEX KEY WRENCH
OPTIONAL ACCESSORIES	
Model 3075M6-120 (10 ft)	CABLE ASSEMBLY, for use above +500°F (+260°C)
Model 2981-3	ADAPTER STUD, 10-32 to 10-32
Model 2981-4	MOUNTING STUD, 10-32 to M5
Model 2771AM3	IN-LINE CHARGE CONVERTOR FOR USE WITH CONSTANT CURRENT SOURCE
Model 298-3	ADAPTER STUD, 10-32 to 10-32

NOTES

1. Low-end response of the transducer is a function of its associated electronics.
2. Short duration shock pulses, such as those generated by metal-to-metal impacts, may excite transducer resonance and cause linearity errors. Send for TP290 for more details.
3. Charge output is temperature compensated.
4. Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 800-982-6732 for recommended intervals, pricing and turn-around time for these services as well as for quotations on our standard products.

Continued product improvement necessitates that Endevco reserve the right to modify these specifications without notice. Endevco maintains a program of constant surveillance over all products to ensure a high level of reliability. This program includes attention to reliability factors during product design, the support of stringent Quality Control requirements, and compulsory corrective action procedures. These measures, together with conservative specifications have made the name Endevco synonymous with reliability.

©ENDEVCO CORPORATION. ALL RIGHTS RESERVED 30700 RANCHO VIEJO ROAD, SAN JUAN CAPISTRANO, CA 92675 USA
(800) 982-6732 • (949) 493-8181 fax (949) 661-7231 • www.endevco.com • Email: applications@endevco.com



0805

MEGGITT
smart engineering for
extreme environments